Ultra High Frequency Digital Radiography with Console System

AIRSTAR DR 300 400 500





Korean Technology








High Frequency Digital Radiography with Console System

AIRSTAR-DR is the most efficient fully digital radiography systems that equipped with digital console and wired / wire free flat panel detector. The most cost-effective solutions and the great versatility in any clinical environment. The high frequency x-ray generator and the powerful rotating anode tube with dual focal spots ensures the confident diagnosis with the optimal quality image creation for all the general radiological purposes such as traumatological, orthopedic and medical examination centers, etc. Its X-ray tube stand which freely rotates 240° and the floating table top with the large range of longitudinal and transversal movements allows the exposures from various angles and easy and fast positioning so both patients and x-ray staffs feel comfortable.





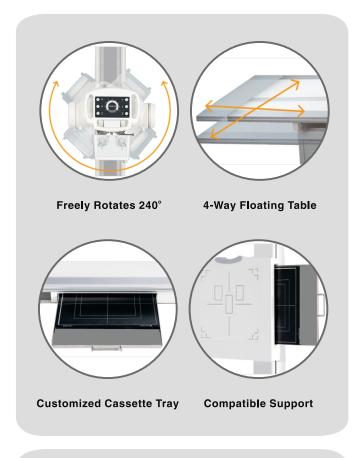



Option 1: Economical choice

Single Detector: Sharable for wall stand and table

Option 2: Choice for high productivity

Dual Detector: Each for wall stand and table

CONVENIENT

- Powerful rotating anode x-ray to pivot 240 degree which allows exposures from various angles
- Anatomical Programmed Radiography (APR) for optimized image quality at low dose
- Intuitive and user-friendly control console
- Self-diagnostic circuit and error codes display
- One touch buttons for fast positioning and exposure

EFFICIENT

- Outstanding image quality for faster and more confident diagnosis
- Ergonomic and robust design for safer and more accurate positioning
- Dual focal spot tube for thin / large part
- Smooth movement of tube stand and bucky devices
- Electro-magnetic lock system for patient safety

HIGH PERFORMANCE

- Superb image quality with high frequency xray generator
- DR Ready—integration ideal for both conventional and digital applications
- Specialized mounting hardware for different digital panels is available upon request.
- DICOM / PACS connectivity as well as the independent image archiving.


DR-RETRO1417

- Better image quality with lower dose.
- i-sync2. More reliable with precious xray auto sensing
- Easy installation and easy multi-modality sharing
- Always charging with backup cable
- 14 x 17" cassette-sized or any customized, wired & wireless detector
- Long battery life and speedy data transmission in gigabits

Technical Specifications

Generator	Capacity	15 KW	32 KW	40 KW	
	KV Range	40-125 kV	40-125 kV	40-125 kV	
	mA Range	10-300 mA	10-400 mA	10-500 mA	
	mAs Range	0.1-250 mAS	0.1-250 mAS	0.1-250 mAS	
	Time Range	0.001~10sec.			
	Frequency	40kHz			
	Anatomical Programming	216 APR			
Tube	Anode heat storage capacity	140 kHU			
	Focal Spots	1.0 / 2.0mm Dual			
	Target Angle	16° rotating at high speed			
	Max Tube Voltage	125kV			
Floor mounted Tube Stand	Vertical Movement	1480mm			
	Horizontal Movement	1550mm			
	Transversal (telescopic) Movement	±265mm			
	Column Rotation	360° (±180°)			
	X-ray Tube Rotation	240° (±120°)			
Floor-Ceiling mounted Tube Stand	Vertical Movement	1480mm			
	Horizontal Movement	2400mm			
	Transversal (telescopic) Movement	±265mm			
	Column Rotation	360° (±180°)			
	X-ray Tube Rotation	240° (±120°)			
Bucky Table	Туре	4-Way floating wide tabletop			
	Tabletop Size	2000 x 800mm (±10%)			
	Horizontal Movement	690mm			
	Lateral Movement	240mm			
	Bucky Device Movement	520mm			
	Max. loading	200kg			
Wall Bucky Stand	Vertical Movement		1340mm		
Power Connection	•	se, 415 VAC, 50/60 Hz			
Option	DAP (Dose Area Product) Meter				
	Three option of tube Stand				
	6-way elevating table				
· ·					

- *800mAs optional (High Speed Rotor)
- * Specifications are Subject to change without prior Notice

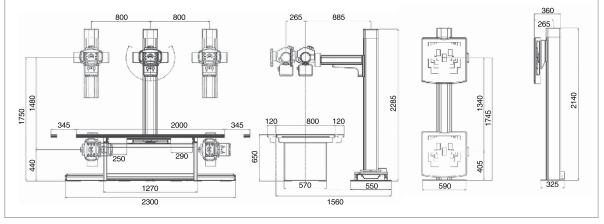





89, Mahia Industrial Estate, Uranganpatti, Madurai - 625 020. Tamilnadu, India.

- **©** 0452 2323307, 0452 2424077
- ☐ 93445 33077, 9842 33077
- Info@med-works.in
- ⊕ www.med-works.in

















