Ultra High Frequency Multi-function / Digital Radiography System

# AIRSTAR Multi 400 500





Korean Technology








### High Frequency Multi-function / Digital Radiography System

**AIRSTAR-MULTI** is the most efficient choice applicable both for digital and analogue environments.

The digital compatible and field upgradeable system offers the most cost-effective solutions and the great versatility in any clinical environment. The high frequency x-ray generator and the powerful rotating anode tube with dual focal spots ensures the confident diagnosis with the optimal quality image creation for all the general radiological purposes such as traumatological, orthopedic and medical examination centers, etc. Its X-ray tube stand which freely rotates 240° and the floating table top with the large range of longitudinal and transversal movements allows the exposures from various angles and easy and fast positioning so both patients and x-ray staffs feel comfortable.

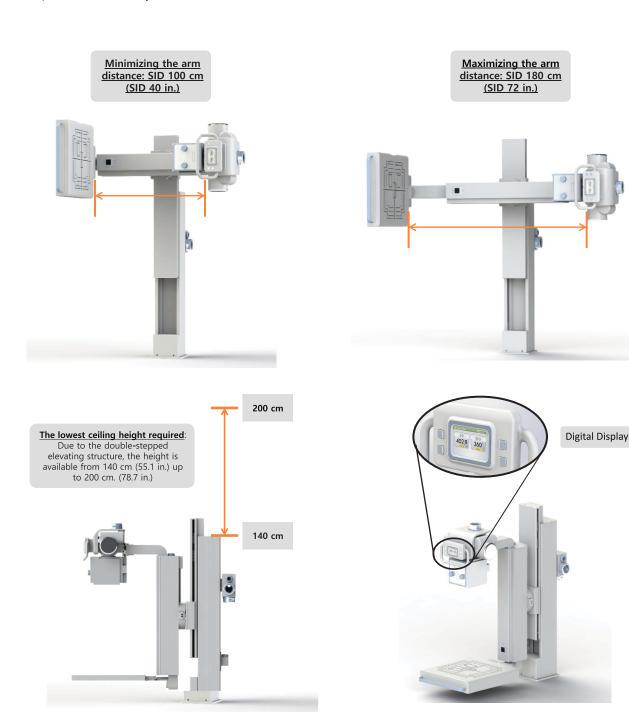





**Option 1: Economical choice** 

Single Detector: Sharable for wall stand and table

Option 2: Choice for high productivity

Dual Detector: Each for wall stand and table

#### **CONVENIENT**

- Powerful rotating anode x-ray to pivot 240 degree which allows exposures from various angles
- Anatomical Programmed Radiography (APR) for optimized image quality at low dose
- Intuitive and user-friendly control console
- Self-diagnostic circuit and error codes display
- One touch buttons for fast positioning and exposure

#### **EFFICIENT**

- Outstanding image quality for faster and more confident diagnosis
- Ergonomic and robust design for safer and more accurate positioning
- Dual focal spot tube for thin / large part
- Smooth movement of tube stand and bucky devices
- Electro-magnetic lock system for patient safety

#### **HIGH PERFORMANCE**

- Superb image quality with high frequency xray generator
- DR Ready—integration ideal for both conventional and digital applications
- Specialized mounting hardware for different digital panels is available upon request.
- DICOM / PACS connectivity as well as the independent image archiving.


#### DIGITAL RETROFIT/UPGRADE

- High quality digital images at an affordable cost
- 17'x17' cassette-sized or any customized, wired & wireless detector
- Long battery life and speedy data transmission in gigabits

## **Technical Specifications**

Generator	Capacity	15 KW	32 KW	40 KW
	KV Range	40-125 kV	40-125 kV	40-125 kV
	mA Range	10-300 mA	10-400 mA	10-500 mA
	mAs Range	0.1-250 mAS	0.1-250 mAS	0.1-250 mAS
	Time Range	0.001~10sec.		
	Frequency	40kHz		
	Anatomical Programming	216 APR		
Tube	Anode heat storage capacity	140 kHU		
	Focal Spots	1.0 / 2.0mm Dual		
	Target Angle	16° rotating at high speed		
	Max Tube Voltage	125kV		
Motorized Movement	1)Source to Image Distance (SID) control 2)Arm elevating movement at vertical"			
Source to Image	100 — 180 cm (40 ~ 72 in. (Continuously Adjustable))			
Vertical Travel	Max.120 cm (47.2 in.)			
Arm Rotation Angle	-30° ~ 120 °			
Tube Rotation	±90°			
Detector Rotation	±45°			
Power Requirement	120VAC or 200-240VAC, 50/60Hz, 1000VA			
Options	Manual Control and motorized with touchable display			
Туре	Class 1			
Options	Bucky enclosure			

<sup>\*</sup> Specifications are Subject to change without prior Notice

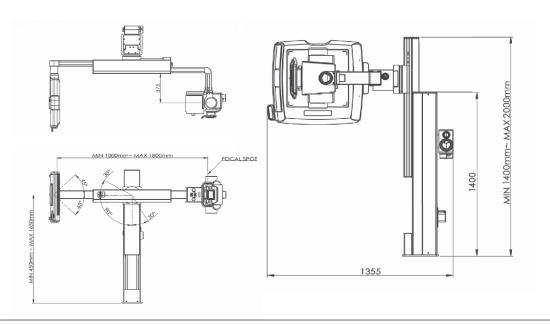



















#### MEDWORKS SOLUTIONS PVT LTD

89, Mahia Industrial Estate, Uranganpatti, Madurai - 625 020. Tamilnadu, India.

- **3** 0452 2323307, 0452 2424077
- ☐ 93445 33077, 9842 I 33077
- ☑ Info@med-works.in
- www.med-works.in