

Pioneer in Imaging

www.med-works.in



**MED
WORKS**

www.med-works.in

Ultra High Frequency Conventional / Digital Radioigraphy System

AIRSTAR Plus 300
400
500



Ultra High Frequency Conventional / Digital Radioigraphy System

Korean Technology



AIRSTAR Plus 300 400 500

High Frequency Conventional / Digital Radiography System

AIRSTAR-Plus is the most efficient choice applicable both for digital and analogue environments. The digital compatible and field upgradeable system offers the most cost-effective solutions and the great versatility in any clinical environment. The high frequency x-ray generator and the powerful rotating anode tube with dual focal spots ensures the confident diagnosis with the optimal quality image creation for all the general radiological purposes such as traumatological, orthopedic and medical examination centers, etc. Its X-ray tube stand which freely rotates 240° and the floating tabletop with the large range of longitudinal and transversal movements allows the exposures from various angles and easy and fast positioning so both patients and x-ray staffs feel comfortable.




Option 1: Economical choice

Single Detector : Sharable for wall stand and table


Option 2: Choice for high productivity

Dual Detector : Each for wall stand and table


Efficient
Convenient
Productivity
High-Performance

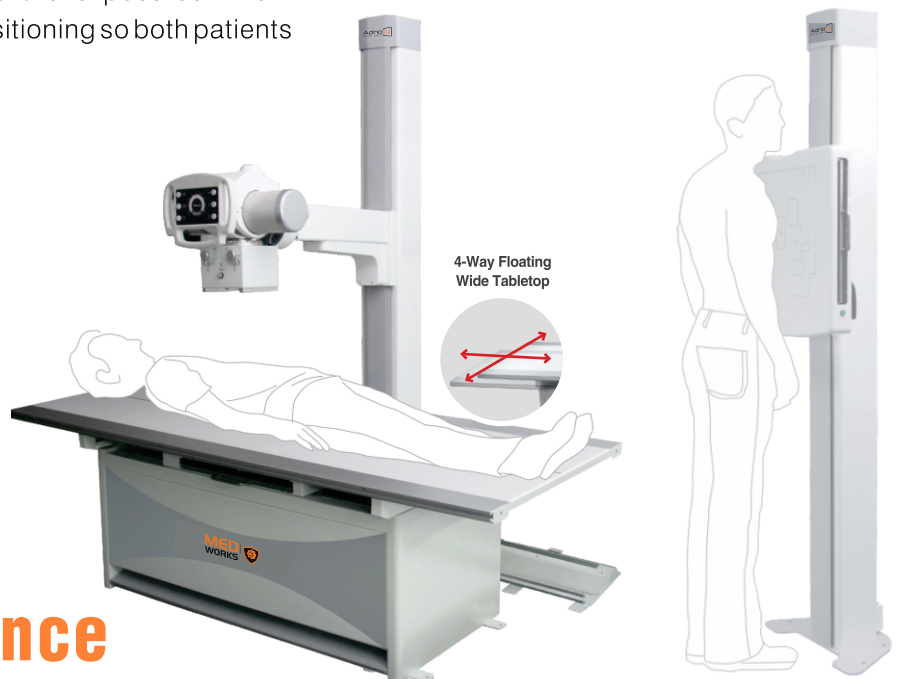

DR Upgrade

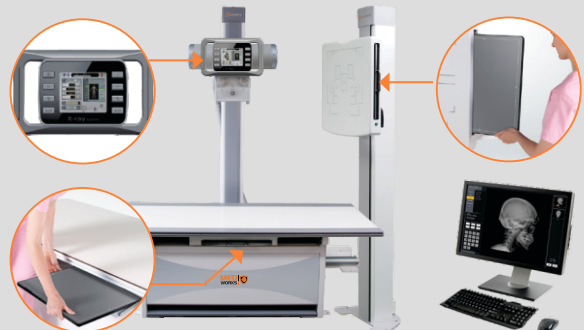

Three options of Tube Stand



240° Rotation



Floor-mounted Tube Stand



Floor-Ceiling mounted Tube Stand



Celing Suspended Tube Stand

CONVENIENT

- Powerful rotating anode x-ray to pivot 240 degree which allows exposures from various angles
- Anatomical Programmed Radiography (APR) for optimized image quality at low dose
- Intuitive and user-friendly control console
- Self-diagnostic circuit and error codes display
- One touch buttons for fast positioning and exposure

EFFICIENT

- Outstanding image quality for faster and more confident diagnosis
- Ergonomic and robust design for safer and more accurate positioning
- Dual focal spot tube for thin / large part
- Smooth movement of tube stand and bucky devices
- Electro-magnetic lock system for patient safety

HIGH PERFORMANCE

- Superb image quality with high frequency xray generator
- DR Ready—integration ideal for both conventional and digital applications
- Specialized mounting hardware for different digital panels is available upon request.
- DICOM / PACS connectivity as well as the independent image archiving.

DIGITAL RETROFIT / UPGRADE

- High quality digital images at an affordable cost
- 17"x17" cassette-sized or any customized, wired & wireless detector
- Long battery life and speedy data transmission in gigabits

Technical Specifications

Generator	Capacity	15 KW	32 KW	40 KW
	KV Range	40-125 kV	40-125 kV	40-125 kV
	mA Range	10-300 mA	10-400 mA	10-500 mA
	mAs Range	0.1-250 mAS	0.1-250 mAS	0.1-250 mAS
	Time Range	0.001~10sec.		
	Frequency	40kHz		
	Anatomical Programming	216 APR		
Tube	Anode heat storage capacity	140 kHU		
	Focal Spots	1.0 / 2.0mm Dual		
	Target Angle	16° rotating at high speed		
	Max Tube Voltage	125kV		
Floor mounted Tube Stand	Vertical Movement	1480mm		
	Horizontal Movement	1550mm		
	Transversal (telescopic) Movement	±265mm		
	Column Rotation	360° (±180°)		
	X-ray Tube Rotation	240° (±120°)		
Floor-Ceiling mounted Tube Stand	Vertical Movement	1480mm		
	Horizontal Movement	2400mm		
	Transversal (telescopic) Movement	±265mm		
	Column Rotation	360° (±180°)		
	X-ray Tube Rotation	240° (±120°)		
Bucky Table	Type	4-Way floating wide tabletop		
	Tabletop Size	2000 x 800mm (±10%)		
	Horizontal Movement	690mm		
	Lateral Movement	240mm		
	Bucky Device Movement	520mm		
	Max. loading	200kg		
Wall Bucky Stand	Vertical Movement	1340mm		
Power Connection	Three phase, 415 VAC, 50/60 Hz			
Option	DAP (Dose Area Product) Meter			
	Three option of tube Stand			
	6-way elevating table			

